



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

PCT/IB 03/02193
10/517473
21.05.03

REC'D 19 JUN 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02077259.6

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 02077259.6
Demande no:

Anmeldetag:
Date of filing: 10.06.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Method and device for writing a multi-layer optical disc

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G11B7/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

Method and device for writing a multi-layer optical disc

EPO - DG 1

10.06.2002

(54)

The present invention relates to a multi-layer optical disc having a multi-layered storage space comprising at least a first storage layer and a second storage layer below the first layer and to methods of writing and of formatting such an optical disc. The invention further relates to a disc drive system suitable for writing such an optical disc.

5

Optical discs in general are known. Optical disc, in general, have a storage space which physically has the shape of a track, either in the shape of a plurality of concentric circular tracks or in the shape of one (or more) continuous spiral shaped track. Data can be written on such a track by means of a radiation beam, such as an optical laser light beam. The optical beam changes certain properties of the disc. Writing occurs at a specific storage location which has a specific logical address and a specific physical position, which can be expressed in a suitable coordinate system, for example polar coordinates (R, ϕ) . A specific class of optical discs is the class of multi-layered discs, such as for example dual layer discs. Such discs are for instance used in DVD-systems. An essential feature of such dual layer discs is the feature that, at a certain physical position (R, ϕ) , data can be written at two different storage locations located at different depths. In the following, such two different storage locations having the same polar coordinates (R, ϕ) but different depth will be indicated by coordinates (R, ϕ, z) , wherein z is either 1 or 2 indicating the first or the second layer. In the following, the storage layer closest to the light receiving surface of the optical disc will be indicated as the first layer or top layer, whereas the further layer will be indicated as the second layer or bottom layer.

20

It is noted that the two storage locations above each other, that is locations at (R, ϕ, z_1) and (R, ϕ, z_2) , respectively, have different logical addresses.

25

As mentioned before, when data is written into an optical disc certain properties of the storage location change. Many discs are made from a material in which, on writing, the optical transmissivity and optical reflectivity of such storage location changes. This applies especially in the case of a disc made from a phase-change material. The phase-change material of a blank disc may, for example, be in an amorphous phase while changing into a crystalline phase under the influence of a writing laser beam.

For such discs this means that, if a disc has a first portion which has been written and a second portion which is still blank, the relevant optical properties of these two portions are very different. In a single layer optical disc this does not pose any problem.

5 However, in the case of a dual layer disc this could lead to a problem when a write or read operation is performed to or from the second layer when the first layer is partly blank and has partly been written. This can be understood as follows. When writing or reading the second layer the optical beam must inevitably pass the first layer. If the first layer is optically not homogeneous, for instance because of being partly blank and partly written, the optical properties of the focal spot (for example, size and/or intensity) at the depth of the second
10 layer will vary due to the varying transmissivity and reflectivity of the first layer. This is an undesirable effect.

The problems as mentioned above occur especially when the first layer is partly blank. If the first layer has been written at least once, a further write operation will not effect such a drastic change of transmissivity and reflectivity and a write process or a read
15 process to or from the second layer will hardly be affected by the number of times that the first layer has been written as long as the first layer has been written at least once.

Therefore, one solution to overcome the above-mentioned problem might be to perform a write operation on the entire first layer, writing for instance dummy information into the first layer, when a blank disc is used for the first time. However, such an operation
20 will take a very long time during which the user can not use the disc.

A main objective of the present invention is to provide a method for writing a multi-layer optical disc and to provide a writing apparatus for writing multi-layer optical discs in which the above problems are avoided while a blank disc is immediately available
25 for use.

According to a key feature of the present invention writing into the second layer is prevented until the first layer has been written. Within the scope of the present invention it is possible to first write the entire first layer and only then allow writing of the second layer. However, it is also possible to allow writing in a portion of the second layer as
30 soon as a corresponding portion of the first layer has been written.

As mentioned above, each individual storage location has a unique logical address, all logical addresses together defining a logical space. When a disc is blank, all logical addresses are basically available for writing. In practice, writing to an optical disc is

of data (such as for example a file) to a disc drive, ordering the disc drive to record the data onto the optical disc. It may be that such application or computer program is designed to select, from the logical address space available, a specific logical address for writing. In selecting a logical address, the user application or computer program may select a logical address corresponding to a storage location located in the second layer while the corresponding first layer has not been written yet. On the other hand, the user application or computer program generally has no information on status details of the optical disc, such as the fact whether or not the optical disc is a dual layer disc and the fact whether or not the first layer of such dual layer disc is still blank. Therefore, a user application or computer program sending data to a disc drive and requesting writing at a specific location generally has not been designed with an eye to the above-mentioned problems.

It is a further objective of the present invention to provide a solution to the above-mentioned problems which is respected by existing user applications or computer programs without needing any amendments to such existing user applications or computer programs.

According to a first aspect of the present invention this objective is attained if the second layer is defined as being defective until at least a portion of the first layer has been written.

According to a second aspect of the present invention a table of blank addresses and written addresses (write history table) is kept, and this information is used, either directly or indirectly, when allocating a logical address in response to a write command. Now, it is possible that the second layer is defined as a used file until at least a portion of the first layer has been written.

These and other aspects, features and advantages of the present invention will be further explained by the following description of preferred embodiments of the method according to the present invention with reference to the drawings, in which same reference numerals indicate same or similar parts, and in which:

Fig. 1 is a functional block diagram, schematically illustrating a disc drive,

Fig. 2A and Fig. 2B are schematical cross-sections of a part of an optical disc,

Fig. 3A and Fig. 3B are diagrams schematically illustrating a storage space of a dual optical disc,

Fig. 4A and Fig. 4B are diagrams schematically illustrating a storage space of a dual optical disc,

Fig. 4C is a schematical cross-section of a part of an optical disc,

Fig. 5A and Fig. 5B are diagrams schematically illustrating a storage space of a dual optical disc, and

Fig. 6 is a diagram schematically illustrating a storage space of a dual optical disc.

Figure 1 schematically shows relevant components of an optical disc drive, generally indicated with reference numeral 1. The optical disc drive 1 comprises receiving means (not shown for sake of convenience) for receiving an optical disc 2, and rotating means 3 for rotating the optical disc 2 at a predetermined rotational speed. The rotating means 3 may be adapted for constant angular velocity drive, or for constant linear velocity drive, or a combination of such modes. Since such receiving means and rotating means are well known in prior art, it is not necessary here to explain their design and functioning in detail.

As is commonly known, an optical disc 2 comprises tracks for writing data, and written data can be read from the tracks. The tracks may be implemented as a plurality of separate, circular tracks, mutually concentric, but the tracks may also be implemented as consecutive turns of a unique, continuous spiral-shaped track. For the context of the present invention, the type of track is not important. For easy reference, the phrase "track" will hereinafter be used to indicate a 360° track portion.

For reading (and possibly writing) data by optical means, the disc player 1 further comprises light beam generating means 4, arranged for scanning the surface of the rotating disc 2 with an optical beam 5, and to derive a read signal S_R from the reflected beam. Typically, the light beam is a laser beam, generated by a laser diode. The light beam generating means 4 comprise an optical head comprising an optical lens system, typically comprising a collimator lens and an objective lens, not shown for sake of convenience. Since in general such light beam generating means are well known in prior art, it is not necessary here to explain their design and functioning in detail.

The disc drive 1 further comprises a disc drive system 10, designed to control the rotating means 3 and the light beam generating means 4 for performing a write operation at a certain location. In Figure 1, the disc drive system 10 is illustrated as having an input 17 for receiving the read signal S_R . Further, the disc drive system 10 is illustrated as having a first output 11 providing a first control signal S_{cr} controlling the operation of the rotating means 3.

providing a data signal S_d to the light beam generating means 4. The disc drive system 10 is further illustrated as having a third output 13 for providing a second control signal S_{c1} for the laser beam generating means 4. As will be clear to a person skilled in the art, this control signal S_{c1} actually involves a control signal for a radial servo actuator controlling the radial location of the laser spot, and a control signal for a focal servo actuator controlling the depth of the focal spot. The data signal S_d represents the information to be written into the optical disc 2. All in all, the disc drive system 10 determines which data to write, and at what physical location to write the data. More specifically, if it is desired that a certain data X is written at a certain logical address L , corresponding to a physical location (R, ϕ, z) , then the disc drive system 10 controls the rotating means 3 and the laser beam generating means 4 in such a way, that the desired data is written at the desired location. Since such disc drive system 10 is known per se, it is not necessary here to explain its design and functioning in detail.

In use, the disc drive 1 communicates with a file system 20 of a user application on a user computer. The file system is designed for handling the writing of user files to disc and the reading of user files from disc. For receiving information from the disc drive, the file system 20 is illustrated as having an input 21 coupled to an output 16 of the disc drive system 10. For instructing the disc drive to write/read information to/from an optical disc, the file system 20 is illustrated as having an output 22 coupled to an input 15 of the disc drive system 10.

Next, in respect of a two-layer disc made from a material in which, on writing, the optical transmissivity and optical reflectivity changes, a problem will be explained with reference to Figures 2A-B. Figure 2A is a schematical cross section of a part of an optical disc 2, which comprises a two-layered storage space 30, comprising a first layer 31 and a second layer 32 wherein the first layer 31 is closer to a light-receiving main surface 6 of the optical disc 2. For writing data into the first storage layer 31, an optical write beam 5 is focused such that the focal spot F coincides with the first layer 31, as illustrated at A. The disc 2 is rotated, and the focal spot F of write beam 5 follows a track (not shown) in first layer 31, modulated by the data signal S_d from the disc drive system 10, causing changes in the optical properties of the first layer 31.

Similarly, when writing data into the second storage layer 32, the write beam 5 is focused such that its focal spot F coincides with the second layer 32, as illustrated at B in Figure 2.

When reading data from the first storage layer 31 or the second storage layer 32, a read beam 5 is similarly focused to the first storage layer 31 or the second storage layer 32, respectively. Basically, a read beam differs from a write beam in that a read beam has less optical power and will not result in a large change of optical properties of the storage layers 31 or 32.

In Figure 2A, it can clearly be seen that, in order to write information into the second storage layer 32, the write beam 5 has to pass through the first storage layer 31, as indicated at 33. If the first layer 31 has homogeneous optical properties, writing into the second layer 32 will not be disturbed by the first layer 31.

Reference numeral 34 indicates a portion of the first layer 31 which has already been written and which has therefore optical properties differing from the remaining part of first storage layer 31. At C is shown a write beam 5 of which a part passes through this written portion 34 of the first storage layer 31. Assuming that the beam 5 moves from the left to the right with respect to the optical disc 2, it should be recognized that the writing process into the second layer 32 is disturbed by the transition from the non-written portion of first layer 31 to the written portion 34 of first layer 31. According to the present invention, this problem is avoided by assuring that the first layer 31 is written before the second layer 32.

Thus, with reference to Figure 2A, the first layer 31 is written first, as indicated at A. The situations indicated at B and C are prevented by the present invention.

Figure 2B is a schematical cross section similar to Figure 2A, showing a relatively large portion 34 of the first layer 31 having been written. At D, a write beam 5 is shown, writing a portion of the second storage layer 32 corresponding to said written portion 34 of the first layer 31. Assuming that the write beam 5 moves from the left to the right in Figure 2B, it can be recognized that the write beam 5 has to pass the written portion 34 of the first layer 31, as indicated at 35, but when moving from the left to the right, the written portion 34 is substantially homogeneous to the write beam 5 such that the write process for the underlying layer 32 is not disturbed.

Figure 3A is a diagram schematically illustrating the storage space 30 of the dual optical disc 2 as a continuous ribbon, divided into storage blocks 40. Each storage block can contain a predetermined number of data bits, as will be known to a person skilled in the art. Each storage block 40 has a unique physical disc address, which substantially corresponds to the physical position of such block on the disc. In Figure 3A, the physical disc

addresses P of the blocks 40 are indicated as consecutive numbers, each block 40 having a physical disc address corresponding to the physical disc address of its predecessor plus one. As illustrated in Figure 3A, the logical blocks 40 usually also have a logical disc address L, allocated by the drive system 10. An important difference between physical disc addresses and logical disc addresses becomes clear when considering defective blocks 41 which are not usable for storing data. In Figure 3A, the blocks having physical disc address N+3, N+4 and N+5 are defective. In other words, when going from left to right in Figure 3A, the last usable block before the defective portion 41 has physical disc address N+2, and the first usable block after the defective portion 41 has physical disc address N+6. When allocating logical disc addresses to the blocks 40 during a formatting operation, it may be that the drive system 10 skips the defective blocks 41, as illustrated in Figure 3A, so that the last usable block before the defective portion 41 has logical disc address N+2, whereas the first usable block after the defective portion 41 has logical disc address N+3.

Further, an important difference is that not all usable blocks are given a logical disc address. The disc drive system 10 may reserve some blocks for its own use only. As an example, in DVD, the drive system 10 reserves the first 30000 blocks for lead in, so that logical disc address L=1 corresponds to physical disc address P=30001. Also, the disc drive system 10 may reserve some blocks as spare area for replacing blocks which get defective during use.

Figure 3B, similar to Figure 3A, also shows the storage space 30 as a ribbon, but now on a different scale. Whereas Figure 3A illustrates individual blocks of a very small portion of the storage space 30, Figure 3B shows the entire storage space 30.

In the example illustrated in Figure 3B, two portions 30RD1 and 30RD2, also indicated as lead-in area and lead-out area, respectively, are reserved for use by the disc drive system 10 itself, i.e. these portions of the storage space 30 are not made available to a user. The drive system 10 has allocated logical disc addresses to the remaining part of the storage space 30, with the exception of a defective area 41 and a spare area 42. The drive system 10 uses the logical disc addresses to make this part of the storage space 30, indicated hereinafter as file system storage space 30F, available to the file system 20.

The mapping of physical disc addresses to logical disc addresses is usually done in accordance with a predefined standard, for instance the Mount Rainier standard.

Information on the relation between physical disc addresses and logical disc addresses is stored in a first portion 51 of the reserved storage space 30RD1. This information will be indicated as disc address information DAI.

The file system 20 is associated with a memory 25 containing, inter alia, a list of files stored on the disc and the corresponding logical disc addresses.

The file system 20 performs a remapping of the logical disc addresses as defined by the disc drive, so as to define a logical space to a user, indicated as user storage space 30U, available for storing user data. Herein, the file system 20 reserves part of the file system storage space 30F for its own use, indicated as reserved file storage portion 30RF; the remaining part of file system storage space 30F is made available for a user as user storage space 30U; logical addresses in this user storage space 30U are indicated as logical user addresses.

When an optical disc is placed into an optical disc drive, the disc address information DAI in the first portion 51 of the reserved storage space 30RD1 is copied into a memory 19 associated with the drive system 10, so that the drive system 10 knows which physical disc addresses P correspond to logical disc addresses L.

When storing information into the disc, the logical user addresses of the file to be stored are translated into logical disc addresses by the file system 20, which are translated into physical disc addresses P by the disc system 10, taking into account the disc address information DAI in said first portion 51 of the reserved storage space 30RD1, so that the defective portion 41 is skipped automatically.

In practice, it may happen that a certain block becomes defective after some time. In Figure 3A, the cross-hatching in the block with physical address $P=N+7$, corresponding to logical address $L=N+4$, indicates a defective block. If the file system 20 would attempt a write to such defective block, this would result in an error message being sent by the drive system 10 to the file system 20.

Figure 3B indicates a second portion 52 of the reserved storage space 30RD1, which contains a defect list DL, i.e. a list of all blocks (physical disc address) that have become defective. When the disc 2 is introduced into a disc drive 1, the defect list DL of the second portion 52 of the reserved storage space 30RD1 is also copied into memory 19 of the drive system 10. When, in operation, during a write operation or a read operation, the drive system 10 encounters a defective block not mentioned in the defect list DL, it will update the defect list DL by incorporating the corresponding physical address and write the updated defect list DL to the disc, either immediately or just before the disc is eventually taken out of the disc drive.

Figure 3B shows the user storage space 30U sub divided into two portions

space 30U which is already occupied by user data. Reference character 30UF indicates part of the user storage space 30U which is still free for storing user data. For sake of simplicity, the occupied user storage space 30UO is illustrated as one continuous part of the user storage space 30U, and also the free user storage space 30UF is shown as one continuous part of the user storage space 30U. In practice, however, the user storage space 30U may be fragmented, i.e. containing multiple occupied portions alternating with free portions.

A portion 53 of the reserved file system storage space 30RF contains a file allocation list FAL, i.e. a list of the files stored by the user, and corresponding logical disc addresses. When the optical disc 2 is introduced into an optical disc drive 1, the file system 20 instructs the drive system 10 to read the file allocation list FAL from the portion 53 of the reserved file system storage space 30RF and to communicate this list to the file system 20, which stores a copy of the file allocation list FAL into its memory 25.

When the file system 20 receives instructions to store a certain file, the file system 20 will only consider logical addresses L in the free user space 30UF on the basis of the information in the file allocation list FAL. When writing data to the disc, the file system 20 will also update the file allocation list FAL, so that the blocks 40 where the data have been written will now be incorporated in the file allocation list FAL and will hence be considered as occupied user storage space 30UO. On the other hand, if the file system 20 receives instructions to delete a file, the corresponding information is removed from the file allocation list FAL, such that the corresponding blocks are now part of the free user storage space 30UF.

The file system 20 will communicate the updated file allocation list FAL to the drive system 10, and will instruct the drive system 10 to write the updated file allocation list FAL to the disc, either immediately or just before the disc is eventually taken out of the disc drive.

In Figure 3B, the user space 30U is shown sub-divided into two sections 30U1 and 30U2, corresponding to first storage layer 31 and second storage layer 32, respectively. More precisely, the first user storage section 30U1 comprises the logical addresses corresponding to storage blocks 40 which are physically located in the first storage layer 31, whereas the second user segment 30U2 comprises logical addresses corresponding to logical blocks 40 which are physically located in the second storage layer 32. Here, the two user segments 30U1 and 30U2 are each shown as being continuous, which corresponds to a situation where subsequent logical disc addresses have first been allocated to the first logical layer 31 whereas all subsequent logical disc addresses have been allocated to the second

storage layer 32. However, this need not be the case in practice. It may be that lower logical disc addresses are allocated to the second storage layer 32 whereas higher logical disc addresses are allocated to the first storage layer 31. It is also possible that logical disc addresses are first allocated to a track in the first storage layer 31, then to a track in the second storage layer 32, then to the next track in the first storage layer 31, etc. It is also possible that tracks are grouped in zones, and that logical disc addresses are first allocated to a zone in the first storage layer 31, then to a zone in the second storage layer 32, then to the next zone in the first storage layer 31, etc. In those cases, the representation of Figure 3B would be more fragmented.

When a conventional dual layer optical disc is placed in a conventional disc drive, and the file system receives a command to write a file, the file system is free to select any portion of the free user storage space 30UF, including a portion corresponding to the second segment 30U2 of the free user storage space 30UF, i.e. the second storage layer 32, even if the first storage layer 31 above has not been written yet. According to the proposals of the present invention, this can be prevented as follows:

A first embodiment of the present invention will now be discussed with reference to Figures 4A and 4B. Consider a "maiden disc" 2 being introduced into a disc drive 1. The phrase "maiden disc" refers to a disc immediately after manufacturing. Such a disc does not yet contain the structure illustrated in Figures 3A and 3B; more particularly, a maiden disc does not yet contain disc address information DAI, nor a defect list DL, nor a file allocation list FAL. When a disc is entered into a drive which is capable of handling multiple types of discs, the drive system 10 first executes a disc recognition process in order to determine the type of disc. Thus, the disc drive system 10 will recognize that the disc is a dual layer disc. Further, the disc drive system 10 will define the blocks 40 in the physical storage space, define logical disc addresses L, define disc address information DAI, define a defect list DL, and define a file allocation list FAL. The conversion from physical disc addresses to logical disc addresses is mostly determined by the disc standard, corresponding to disc type. After having performed the formatting operation, the disc drive system 10 will know which logical addresses correspond to the second storage layer 32, indicated as second user storage space 30U2. According to an important aspect of this first embodiment of the present invention, the disc drive system 10 is designed to mark the entire second user storage space 30U2 as being defective, indicated as the cross-hatched area 30UD in Figure 4A. In other words, all addresses corresponding to the second user storage space 30U2 are listed in

the defect list DL.

The fact that the disc drive system 10 has marked the entire second user storage space 30U2 as being defective, i.e. that all physical addresses corresponding to the second user storage space 30U2 are listed in the defect list file DL stored in portion 52 on disc, will force any file system to only write information in the first user storage space 30U1, i.e. in the first storage layer 31. This applies even to conventional file systems not designed in accordance with the present invention. Such conventional file system may attempt a write in the second storage layer 32, but this will result in an error message generated by the drive system 10.

According to a preferred aspect of the present invention, the defect list DL is also communicated to the file system 20, which stores a copy of the defect list DL into its memory 25. Further, according to this preferred aspect of the present invention, the file system 20 is adapted to take the defect list DL into account when choosing logical disc addresses in response to a command to store a file, so that defective blocks are skipped while error messages are avoided. In other words, in the case of a file system designed in accordance with the present invention as explained above, such file system will not even attempt a write in the second storage layer 32.

In this respect, it is noted that the defect list DL contains physical disc addresses, whereas the file system storage space 30F, available to the file system 20, is defined by logical disc addresses allocated by the disc drive system 10. Therefore, the file system 20 is only capable of taking the defect list DL into account if the file system 20 is also equipped with knowledge regarding the correspondence between physical disc addresses and logical disc addresses. This can be implemented in several ways. First, it is possible to also communicate to the file system 20 the disc address information DAI in said first portion 51 of the reserved storage space 30RD1. Alternatively, it is also possible that the disc has been formatted according to a certain standard, such as for instance the Mount Rainier standard, which includes the length of the lead-in area 30RD1 and the locations of spare area; in that case, it is sufficient to communicate this information to the file system 20, so that the file system 20 can calculate an approximate correspondence between logical addresses and physical addresses.

It should be recognized that, once a dual layer disc has been formatted by a disc drive embodying the present invention, also conventional disc drives, i.e. disc drives which are not embodying the present invention, are prohibited from writing information in the second storage layer 32, because conventional disc drives take the defect list DL into account. Thus, by incorporating all physical addresses of the second storage layer 32 in the

defect list DL, the second storage layer 32 is virtually made inaccessible, even to conventional disc drives and conventional user programs not embodying the present invention.

5 The second user storage space 30U2, indicated as being defective by being included entirely in the defect list 52, actually is of course not defective at all, and constitutes potentially usable storage space. Logical addresses within this potentially usable storage space can be made actually usable by removing these logical addresses from the defect list DL. In fact, if no further action were taken, the second storage layer could never be used and the effective storage capacity of the disc would be reduced by half. Therefore, according to a
10 preferred important aspect of the present invention, logical addresses in the second user storage space 30U2 are removed from the defect list DL at a suitable time.

In a certain embodiment, a drive system according to the present invention may be programmed to, in a first stage, only write data to the first storage layer 31, without updating the defect list. Only when the first storage layer 31 is completely full, the drive
15 system removes from the defect list all logical addresses of the second storage layer 32, thus making the entire second storage layer 32 available in one go. However, a disadvantage of this method is that the user does not have a realistic view on the available storage space of his disc. As is commonly known, computers have a feature which allows to scan a memory device for the amount of available memory. In the present case, if the disc drive would
20 receive a command to scan the disc for available memory during said first stage, the disc drive would only recognize the first user storage space 30U1 as available memory and, as the occupied user storage space 30UO increases and approaches the limits of the first user storage space 30U1, the disc drive will tell the user that the amount of free user storage space 30UF approaches zero, while in fact the disc is still half empty.

25 Therefore, in a preferred embodiment, a disc drive system according to the present invention is programmed to update the defect list 52 after each write operation to the first user storage area 30U1, thus giving part of the second user storage area 30U2 free for writing. Such embodiment is illustrated in Figure 4B. Figure 4B illustrates the situation of a disc having a first user storage area 30U1 which has partly been written, indicated by
30 occupied user storage area 30UO. After the write operation, the disc drive system has liberated a portion 30UL of the second user storage area 30U2 by removing from the defect list the physical addresses corresponding to this liberated portion 30UL. The remaining portion of the second user storage area 30U2 is still indicated as being defective area 30UD.

The free user storage area 30UF now includes the liberated portion 30UL of the second user storage area 30U2.

It should be recognized that now a user will be given a more realistic view of the amount of free storage space available.

5 After each write operation, the disc drive system 10 according to the present invention calculates which logical addresses can be liberated as described above. In such calculation, the disc drive system 10 takes into account various properties of the disc 2 and of the disc drive 1, as illustrated in Figure 4C. Figure 4C is a schematical cross section of a disc 1, schematically showing top surface 6, first storage layer 31 and second storage layer 32. 10 The shape of a laser beam focused to the second storage layer 32 is indicated with a dashed line. A first written portion of the first storage layer 31 is indicated at 61. A corresponding portion of the second storage layer 32, physically located below the portion 61, is indicated at 62. If light rays would impinge exactly perpendicularly to the top surface 6, the second portion 62 would be entirely in the shade of the first portion 61, so it might be liberated. 15 However, due to the top angle of the focused light beam 5, the first portion 61 is not large enough to allow liberation of the second portion 62.

Figure 4C also shows another written portion 63 of the first layer 31, larger than the first written portion 61. The laser beam 5 is shown in two extreme positions 5a and 5b. The left hand extreme position of the laser beam 5a corresponds to the left-most position 20 of the laser beam where the entire laser beam passes the portion 63. Similarly, the right-most position 5B of the laser beam is the right-most position where the entire laser beam passes the portion 63. When moving the laser beam from the left-most position 5a to the right-most position 5b, the laser beam always passes the portion 63 entirely and is not disturbed by variations in the first layer, because this portion 63 is free from such variations. Thus, the 25 left-most laser beam 5a defines a left extremity 64a of a portion 64 of the second storage layer 32, while the right-most laser beam 5b defines a right extremity 64b of such portion 64, which can be considered as being entirely in the shade of the portion 63.

Thus, if the portion 63 of the first storage layer 31 is large enough, a portion 64 of the second storage layer 32 can be liberated. It is noted that the above considerations 30 apply to the radial dimension of the portions 63, 64 as well as to the circumferential dimension of the portions 63, 64.

According to a further preferred embodiment, the disc drive system 10 defines a table DT identifying a defect type in respect of each physical address mentioned in the defect list DL. This defect type list DT is also stored on disc, in a portion of the lead-in area

30RD1, although in principle it may also be possible to store this defect type list DT as a hidden file in user area, assuming that the disc system 20 has the proper file system knowledge. The information stored in this defect type list DT identifies, inter alia, whether a block is truly defective or virtually defective. Thus, when the disc drive system 10 specifies all addresses of the second storage layer 32 as being defective, it writes in the defect type list DT a code indicating that these addresses are only virtually defective.

This information can be used in several ways. When a disc drive is asked to scan the disc for the available amount of storage space, a disc drive system 10 programmed in accordance with the invention can take this information in the defect type list DT into account by considering the virtually defective blocks as potential storage space, so as to give the user a more realistic view of the storage capacity of the disc. Also, this information allows the disc drive system 10 to distinguish between blocks which have been made temporarily inaccessible in accordance with the invention on the one hand, and blocks which have truly prove defective in the other hand. Then, after a write session in respect of the first storage layer 31, when making the calculations for liberating a portion 30UL of the second storage layer 32 as described with reference to Figure 4B, the disc drive system 10 will only liberate blocks which are labeled "virtually defective" and will maintain in the defect list blocks which are labeled "truly defective".

A second embodiment of the present invention will now be discussed with reference to Figure 6. In this second embodiment, the optical disc 2 contains a write history table WHT, preferably stored as a system file in a portion 54 of the lead-in area 30RD1, as shown, which table contains information with respect to all physical disc addresses, indicating whether or not a physical address has already been written to. For instance, for each physical address, the write history table may comprise a bit which has a first value, for instance "0", when the corresponding physical address is still maiden, and which has a second value, for instance "1", when the corresponding physical address has at least been written to once.

According to this embodiment, when a disc is placed in a disc drive, the drive system 10 reads the write history table WHT from disc and stores the write history table WHT into its memory 19. Further, the drive system 10 communicates the write history table WHT to the file system 20, which stores the write history table WHT into its memory 25. A file system 20 according to this embodiment is adapted to, before any write operation, check the information in this write history table to determine which portions of the second user

storage area 30U2 correspond to portions of the first user storage area 30U1 which have been written such that the portion of the second user storage area 30U2 is free to be written to.

In the case of DVD+RW, such a table is standard, and the file system 20 can use the information in this standard write history file.

5 After a write operation, the write history table WHT is updated by the disc drive system 10 by writing the second value "1" into the bits corresponding to the logical addresses L which have been written during such write operation.

10 The second embodiment as explained above involves both a disc drive system 10 and a file system 20 designed in accordance with the present invention. However, this solution is not respected automatically by a conventional disc drive, even in conjunction with a file system 20 designed in accordance with the present invention, because a conventional disc drive system 10 is not programmed to read the write history table, nor to update the write history table. On the other hand, this solution is not respected automatically by a conventional file system, even in conjunction with a disc drive designed in accordance with
15 the present invention, because a conventional file system is not programmed to select storage locations on the basis of a write history table WHT. Therefore, in a preferred embodiment, the file system 20 is designed to define the second storage layer as used area.

20 This preferred aspect of the present invention will now be discussed with reference to Figures 5A and 5B. Similar to Figure 4A, Figure 5A illustrates the logical storage space 30 of an optical disc 2. Again, assume a maiden disc being formatted by the file system 20. In this second embodiment, the file system 20 is adapted to define a system file with a predetermined name, for instance "DUMMY", and to specify this system file "DUMMY" in the file allocation list 53 as covering all logical addresses in the second user storage area 30U2. This file allocation list 53 is stored on disc. The file "DUMMY" is
25 preferably defined as a hidden file.

30 As explained with reference to Figures 4A and 4B with respect to the first embodiment, any file system attempting a write operation on the disc drive 2 will take into account the information in the file allocation list FAL when selecting logical addresses for storing information. Since file systems are not allowed to store information in those locations where a file is already stored, any file system can not write any information to the second storage layer 32 because the information in the file allocation list 53 tells such file system that the second storage layer 32 is already occupied by a file, i.e. the hidden system file "DUMMY". Thus, this solution is also respected by conventional disc drives and by conventional file systems.

Similarly as above, it is possible to first write the entire first layer 31 and only then liberate the second layer 32. However, similarly as explained before, a file system 20 according to the present invention is preferably adapted to modify the information in the file allocation list 53 after each write operation, such as to liberate a portion 30UL of the second user storage area 30U2 if the amount of physical area already written in first storage layer 31 is sufficiently large, as explained before with reference to Figure 4C.

In the above-described embodiments, the write history table WHT is used directly by the file system 20, either in the process of selecting storage space for writing, or in the process of liberating a portion of the second storage layer. In both cases, since the write history table WHT relates to physical disc addresses, the file system 20 should have some information on the correspondence between physical disc addresses and logical disc addresses, for instance by having access to the disc address information DAI in said first portion 51 of the reserved storage space 30RD1, or by having information on the standard according to which the disc has been formatted.

In a further preferred embodiment, the file system 20 uses the write history table WHT indirectly. In this further preferred embodiment, the disc drive system 10 defines, on the basis of the write history table WHT, a write allowability table WAT, which specifies which addresses of the second storage layer are free to be written, which write allowability table WAT is communicated to the file system 20. For instance, in respect of each logical disc address, the write allowability table WAT may have a bit having a first value ("0") if writing is not allowed and having a second value ("1") if writing is allowed.

In this case, when ordered to write a file to disc, the file system may be designed to only select logical disc addresses on the basis of the information in the write allowability table WAT. However, in order to assure that the prohibition of the second storage layer is respected by conventional disc drives and by conventional file systems, the file system is preferably designed to define a system file with a predetermined name ("DUMMY"), covering all addresses of the second storage layer. Then, when writing a file, the file system can select storage space on the basis of the file allocation list FAL, as usual. The disc drive system 10 is designed to update the write history table WHT, to update the write allowability table WAT on the basis of the updated write history table WHT, and to communicate the updated write allowability table WAT to the file system 20. The file system is designed to update the file allocation list FAL in order to liberate a storage portion 30UL from the said system file, and to make its calculations in this respect on the basis of the

An advantage of utilizing the defect list DL or writing a special system file DUMMY is that a dual layer disc which has been prepared in accordance with these embodiments will also be respected by any conventional or existing file system, because such conventional file system must automatically take into account information from the defect list or the file allocation list. A conventional file system will not necessarily check a write history table WHT or a write allowability table WAT.

An advantage of utilizing the defect list DL over utilizing a special system file DUMMY is that it is not necessary to define an additional system file with a predetermined name.

It should be clear to a person skilled in the art that the present invention is not limited to the exemplary embodiments discussed above, but that various variations and modifications are possible within the protective scope of the invention as defined in the appending claims.

In the above, the present invention has been explained for the case of a dual layer disc, i.e. a disc having two different storage layers. The same principles of the present invention apply, however, also in the case of a disc having three or more layers.

Further, as an alternative, it is also possible to implement a drive system with file system capabilities, so that the drive system itself can perform all inventive actions which are attributed to the file system in the above description. As an advantage, it is then not necessary for the disc drive to communicate disc information to an outside file system, and actions of updating the information on disc (defect list, file allocation list, write history table) in order to liberate portions of the second storage layer do not depend on the file system being implemented in accordance with the present invention.

Further, it is noted that the functionality described above may be implemented in hardware or in software, as desired.

CLAIMS:

10. 06. 2002
- DG 1
(54)

1. Method of writing an optical disc having a multi-layered storage space comprising at least a first storage layer and a second storage layer below the first layer, the method comprising the step of preventing a write operation to a portion of the second storage layer located below a maiden portion of said first storage layer.
- 5 2. Method according to claim 1, wherein writing to the second storage layer is prevented until the first storage layer has been completely written.
3. Method according to claim 1, comprising the step of allowing a write
10 operation to a portion of the second storage layer if a sufficiently large portion of the first storage layer, overlying said second storage layer portion, has been written at least once, wherein said portion of the first storage layer is smaller than the total first storage layer.
4. Method according to claim 3, wherein said portion of the second storage layer
15 is larger than said portion of the first storage layer.
5. Method according to claim 3, wherein said portion of the second storage layer is smaller than said portion of the first storage layer.
- 20 6. Method according to any of the previous claims, wherein a write operation to a portion of the second storage layer is prevented by defining said portion as being defective.
7. Method according to claim 6, wherein a distinction is made between truly
25 defective storage blocks and storage blocks which are merely temporarily defined as being defective.
8. Method of formatting an optical disc having a multi-layered storage space comprising at least a first storage layer and a second storage layer below the first layer, the method comprising the steps of:

- defining logical disc addresses for logical blocks of the storage space;
 - defining reserved storage space in the storage space;
 - defining a defect list, and storing the defect list in a predetermined portion of the reserved storage space; and
- 5 – incorporating into the defect list addresses of all blocks which are physically located in the second storage layer.
9. Formatting method according to claim 8, further comprising the steps of:
- defining a defect type list, and storing the defect type list in a predetermined portion of
- 10 the storage space, preferably a portion of the reserved storage space; and
- writing into the defect type list, in respect of the blocks which are physically located in the second storage layer, a virtually defective code indicating that these blocks are only virtually defective.
- 15 10. Formatting method according to claim 8 or 9, further comprising the steps of:
- writing disc address information regarding the relation between physical disc addresses and logical disc addresses into a predetermined portion of the reserved storage space.
11. Multi-layered optical disc having a multi-layered storage space comprising at
- 20 least a first storage layer and a second storage layer below the first layer, the disc containing a defect list in a predetermined portion of a reserved storage space;
- wherein the physical disc addresses of all blocks which are physically located in the second storage layer, and which are located below a maiden portion of said first storage layer, are all incorporated in said defect list.
- 25 12. Multi-layered optical disc according to claim 11, further containing a defect type list in a predetermined portion of the storage space;
- wherein, in respect of those blocks which are physically located in the second storage layer, and which are located below a maiden portion of said first storage layer, the defect type list
- 30 contains a virtually defective code indicating that these blocks are only virtually defective.
13. Multi-layered optical disc according to claim 11 or 12, further containing disc address information regarding the relation between physical disc addresses and logical disc addresses in a predetermined portion of the reserved storage space.

14. Disc drive system, capable of controlling a rotating means and a light beam generating means of an optical disc drive, suitable for writing a multi-layered optical disc having a multi-layered storage space comprising at least a first storage layer and a second

5 storage layer below the first layer;

the disc drive system being adapted to perform a formatting operation in accordance with any of claims 8-10.

15. Disc drive system, capable of controlling a rotating means and a light beam
10 generating means of an optical disc drive, suitable for writing a multi-layered optical disc according to any of claims 11-13;

the disc drive system being adapted to read the defect list from said disc and to communicate the defect list to a file system.

15 16. Disc drive system according to claim 15, further adapted to read the defect type list from said disc and to communicate the defect type list to a file system.

17. Disc drive system according to claim 15 or 16, further adapted to read the disc address information from said disc and to communicate the disc address information to a file
20 system.

18. Disc drive system according to any of claims 14-17, the system being adapted to check, after having written a maiden portion of said first storage layer, whether said first storage layer has been written completely; to maintain the defect list if said check reveals that
25 said first storage layer has not yet been written completely; alternatively, if said check reveals that said first storage layer has been written completely, to remove from said defect list all logical addresses of blocks which are physically located in said second storage layer.

19. Disc drive system according to any of claims 14-17, the system being adapted,
30 after having written a maiden portion of said first storage layer, to remove from said defect list physical disc addresses of blocks which are physically located in a portion of said second storage layer located below said written maiden portion of said first storage layer.

20. Disc drive system according to claim 19, the system being adapted, when calculating which physical disc addresses to remove from said defect list, to take into account various properties of the disc and of a disc drive concerned.

5 21. Disc drive system according to any of claims 18-20, adapted to read the defect type list from said disc, and further adapted, when determining which physical disc addresses to remove from said defect list, to take into account the codes stored in the defect type list, such that blocks which are truly defective are maintained in the defect type list.

10 22. File system, designed for communicating with a disc drive system of an optical disc drive, and designed for handling the writing of user files to disc and the reading of user files from disc;
the file system being provided with a memory;
the file system being adapted to receive from a disc drive system according to any of claims
15 16-21 a defect list and to store this defect list into said memory;
the file system further being adapted to take the defect list into account when choosing logical disc addresses in response to a command to store a file.

20 23. File system according to claim 22, further adapted to receive from a disc drive system disc address information and to store this disc address information into said memory;
the file system further being adapted to take the disc address information into account when choosing logical disc addresses in response to a command to store a file.

25 24. Method according to any of claims 1-5, wherein a write operation to a portion of the second storage layer is prevented by defining said portion as being occupied.

25. Method of formatting an optical disc having a multi-layered storage space comprising at least a first storage layer and a second storage layer below the first layer, the method comprising the steps of:
30 – defining logical disc addresses for logical blocks of the storage space;
– defining reserved storage space in the storage space;
– defining a write history table, and storing the write history table in a predetermined portion of the storage space, preferably in a predetermined portion of the reserved storage

- writing into the write history table, in respect of all blocks of the storage space, a code having a first value indicating that these blocks are still maiden.

26. Multi-layered optical disc having a multi-layered storage space comprising at
5 least a first storage layer and a second storage layer below the first layer, the disc containing a write history table in a predetermined portion of the storage space, preferably in a predetermined portion of the reserved storage space;
the write history table containing, in respect of the physical disc addresses of each block, at least of those blocks which are physically located in the first storage layer, a code having a
10 first value in respect of blocks which are maiden and having a second value in respect of blocks which have been written at least once.

27. Disc drive system, capable of controlling a rotating means and a light beam
generating means of an optical disc drive, suitable for writing a multi-layered optical disc
15 having a multi-layered storage space comprising at least a first storage layer and a second storage layer below the first layer;
the disc drive system being adapted to perform a formatting operation in accordance with claim 25.

20 28. Disc drive system, capable of controlling a rotating means and a light beam generating means of an optical disc drive, suitable for writing a multi-layered optical disc according to claim 26;
the disc drive system being adapted to read the write history table from said disc and to store said write history table into a memory.

25 29. Disc drive system according to claim 28, further adapted to communicate the write history table to a file system.

30 30. Disc drive system according to claim 28 or 29, the system being adapted, at least after having written a maiden portion of said first storage layer, to write into the write history table, in respect of all blocks which have been written in the writing operation, a code having a second value indicating that these blocks have been written at least once.

31. File system, designed for communicating with a disc drive system of an optical disc drive, and designed for handling the writing of user files to disc and the reading of user files from disc;

the file system being provided with a memory;

- 5 the file system being adapted to receive from a disc drive system according to claim 29 or 30 a write history table and to store this write history table into said memory;
- the file system further being adapted to take the write history table into account when choosing logical disc addresses in response to a command to store a file.

- 10 32. File system according to claim 31, further being adapted to define a system file with a predetermined name, such that this system file occupies all logical addresses of blocks which are physically located in said second storage layer.

33. Multi-layered optical disc having a multi-layered storage space comprising at
15 least a first storage layer and a second storage layer below the first layer, the disc containing a file allocation list in a predetermined portion of a reserved storage space;
- wherein the file allocation list contains at least one system file with a predetermined name, of which it is specified that it occupies all blocks which are physically located in the second storage layer, and which are located below a maiden portion of said first storage layer.

- 20 34. File system according to claim 32, designed for handling the writing and the reading of user files to or from a disc according to claim 33, further adapted, after a write operation, to receive from the disc drive system the updated write history table, and to update the file allocation list accordingly with respect to said system file with a predetermined name,
- 25 such that logical addresses of blocks which are physically located in a portion of said second storage layer located below said written maiden portion of said first storage layer are removed from said file allocation list.

35. Method according to any of the claims 1-5, comprising the steps of defining a
30 write allowability table comprising in respect of each block, at least in respect of the blocks physically located in the second storage layer, a code indicating whether or not it is allowed to write in such block;

setting the code to a first predetermined value in respect of those blocks in the second storage layer which are located below the written maiden portion of said first storage layer.

wherein a write operation to a block is prevented if the corresponding code in the write allowability table has said first predetermined value.

36. Method according to claim 35, wherein, after a maiden portion of said first storage layer has been written, in respect of those codes in the write allowability table corresponding to blocks located below said written maiden portion of said first storage layer the value is set to a second predetermined value indicating that writing is now allowed.

37. Disc drive system according to any of claims 27-30, the disc drive system being adapted to calculate a write allowability table on the basis of the write history table, and to communicate said write allowability table to a file system.

38. File system, designed for communicating with a disc drive system of an optical disc drive, and designed for handling the writing of user files to disc and the reading of user files from disc;
the file system being provided with a memory;
the file system being adapted to receive from a disc drive system according to claim 37 a write allowability table and to store this write allowability table into said memory;
the file system further being adapted to take the write allowability table into account when choosing logical disc addresses in response to a command to store a file.

39. Disc drive, suitable for writing a multi-layered optical disc;
the disc drive comprising a disc system in accordance with any of claims 14-21, or 27-30, or 37.

ABSTRACT:

A method is described for writing an optical disc (2) having a multi-layered storage space (30) comprising at least a first storage layer (31) and a second storage layer (32) below the first layer (31). The method comprises the step of preventing a write operation to a portion of the second storage layer (32) located below a maiden portion of said first storage layer (31).

In one embodiment, all blocks (40) which are physically located in the second storage layer (32) are incorporated in a defect list (DL), until a sufficiently large portion of the first storage layer (31) has been written at least once.

In another embodiment, all blocks (40) which are physically located in the second storage layer (32) are covered by a system file with a predetermined name ("DUMMY"), until a sufficiently large portion of the first storage layer (31) has been written at least once.

Fig. 2A

EPO - DG 1
10. 06. 2002
(54)

1/7

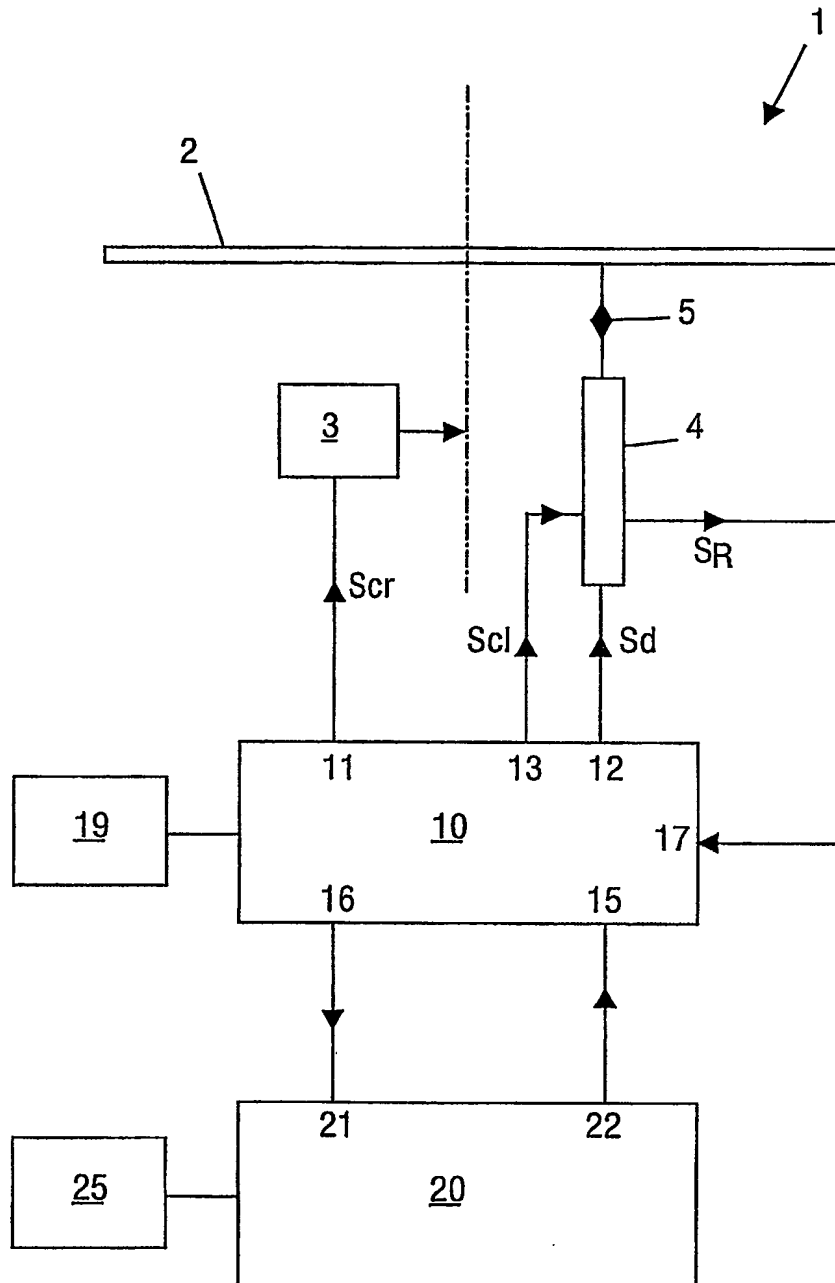


FIG. 1

EPO - DG 1
10. 06. 2002

(54)

2/7

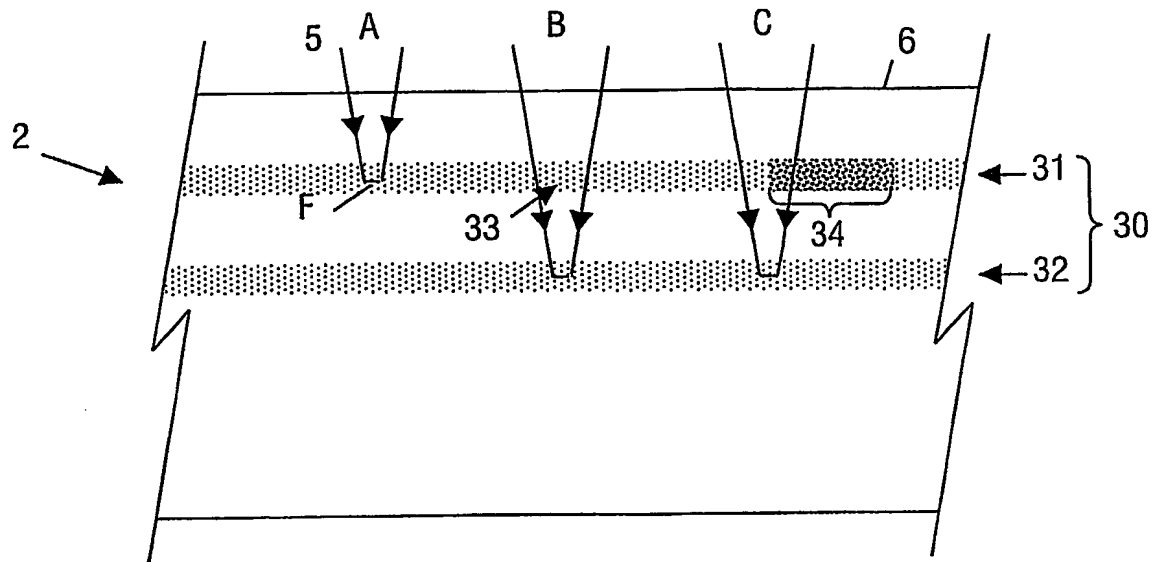


FIG. 2A

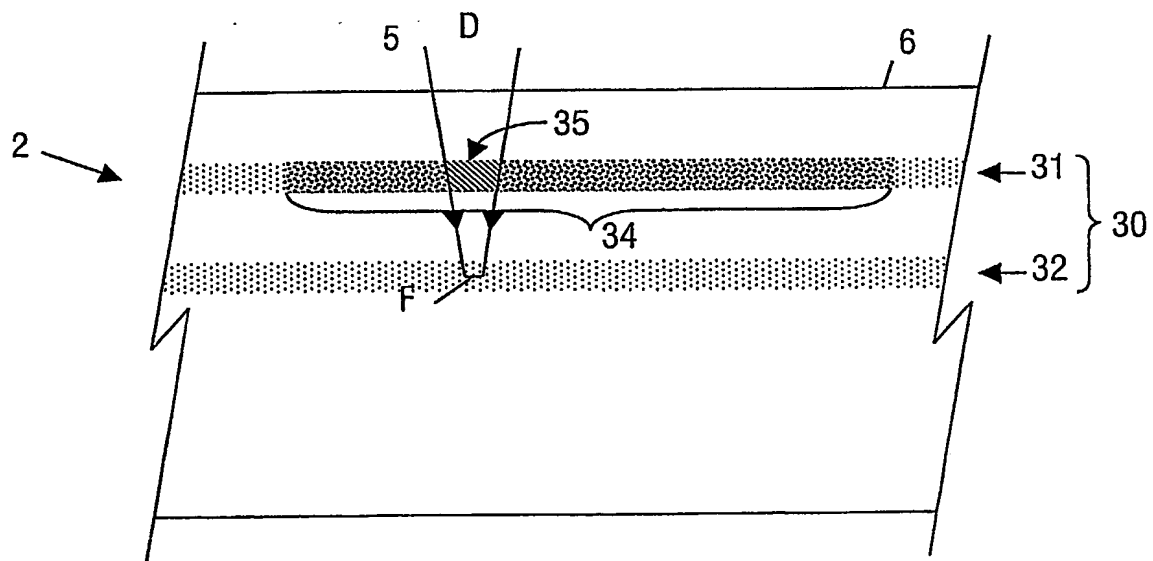


FIG. 2B

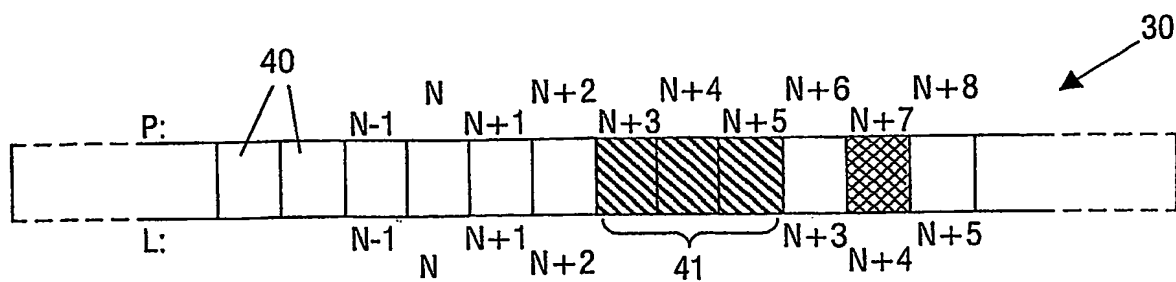


FIG. 3B

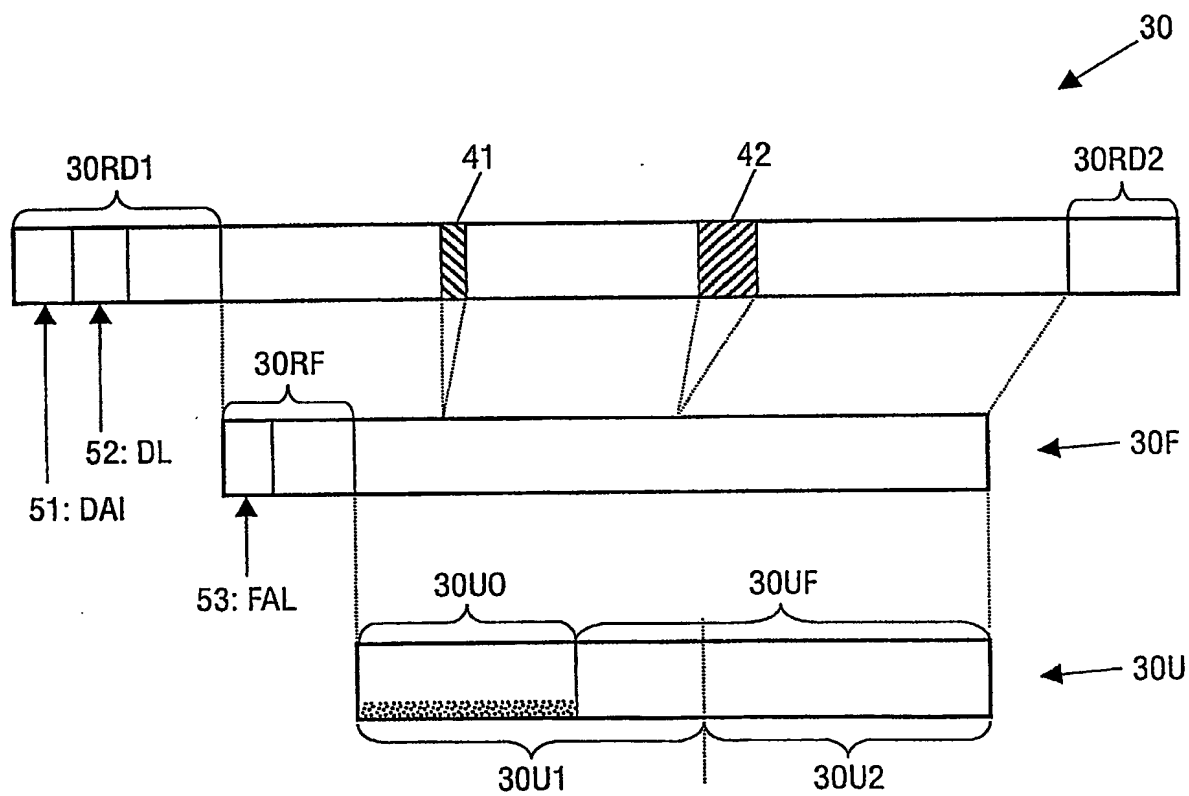


FIG. 3B

5/7

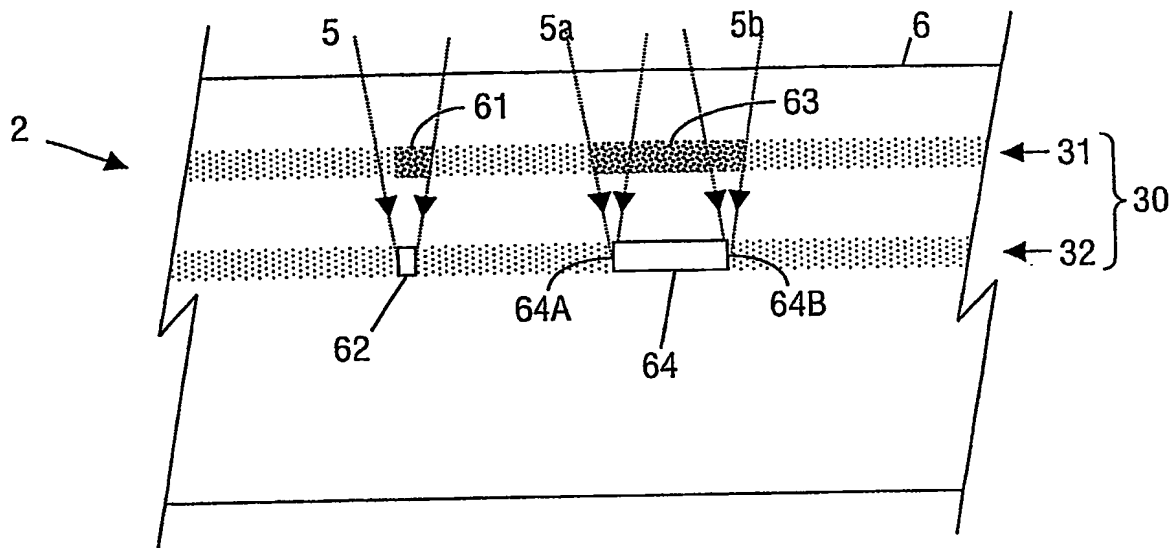


FIG. 4C

6/7

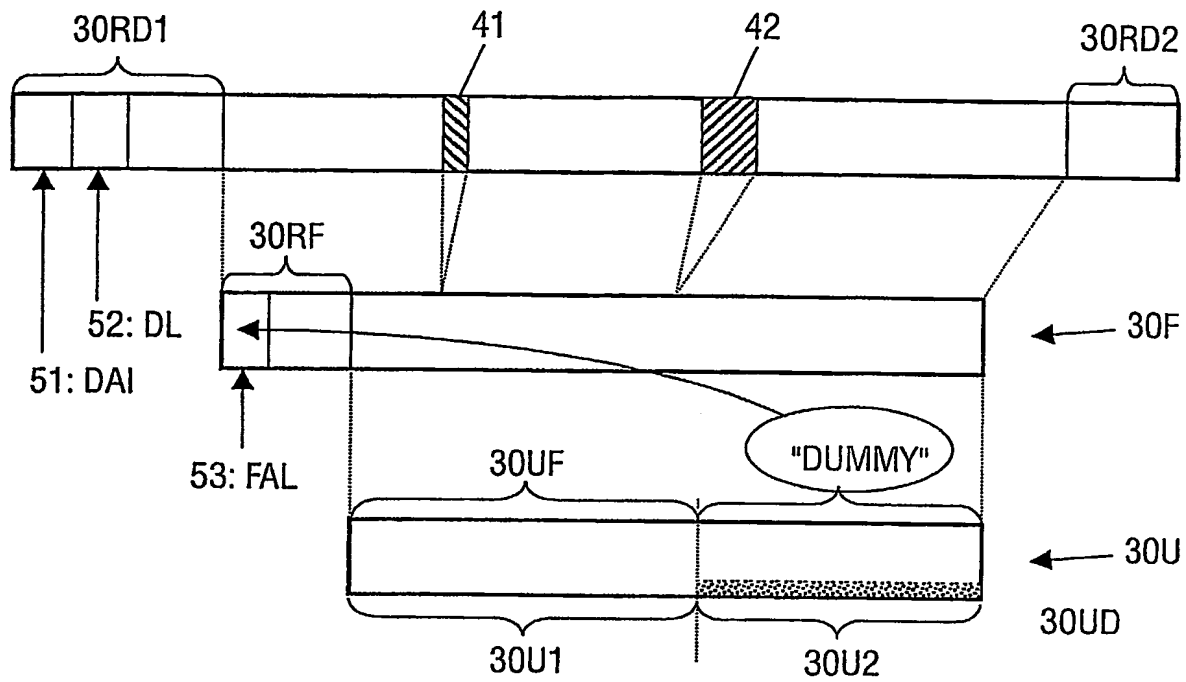
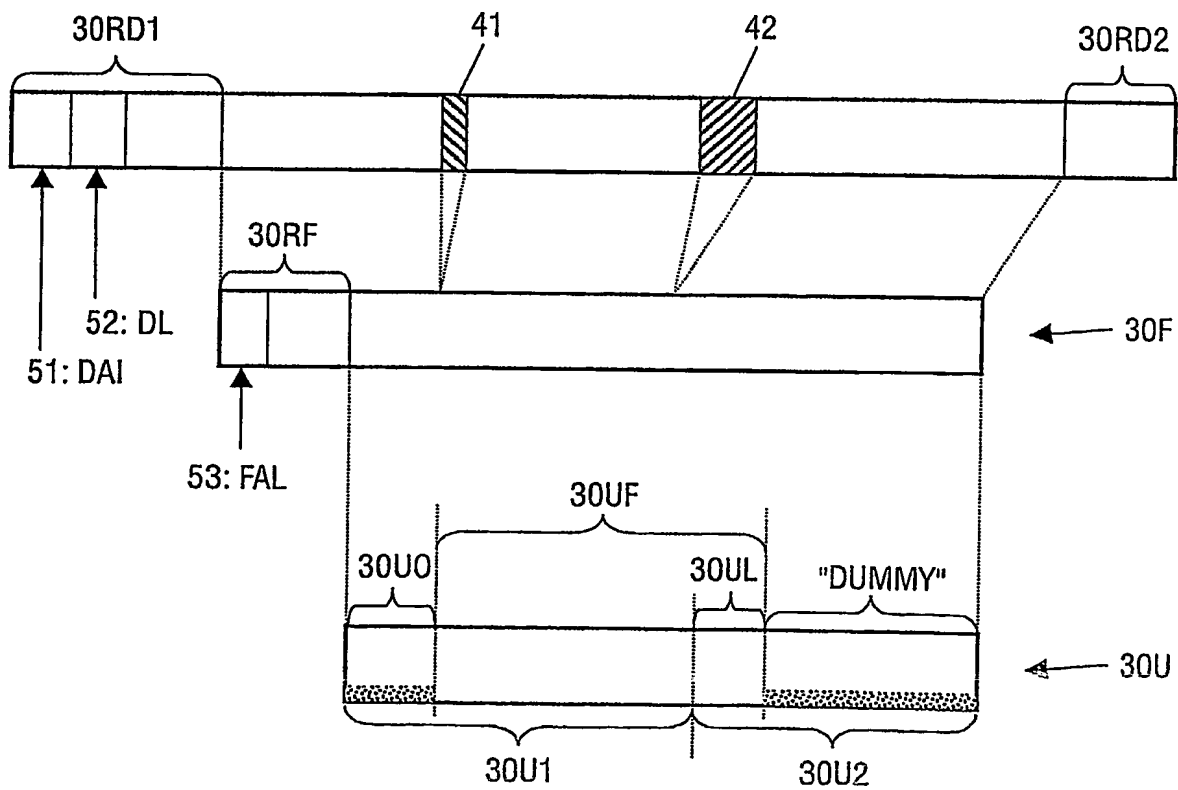


FIG.5A



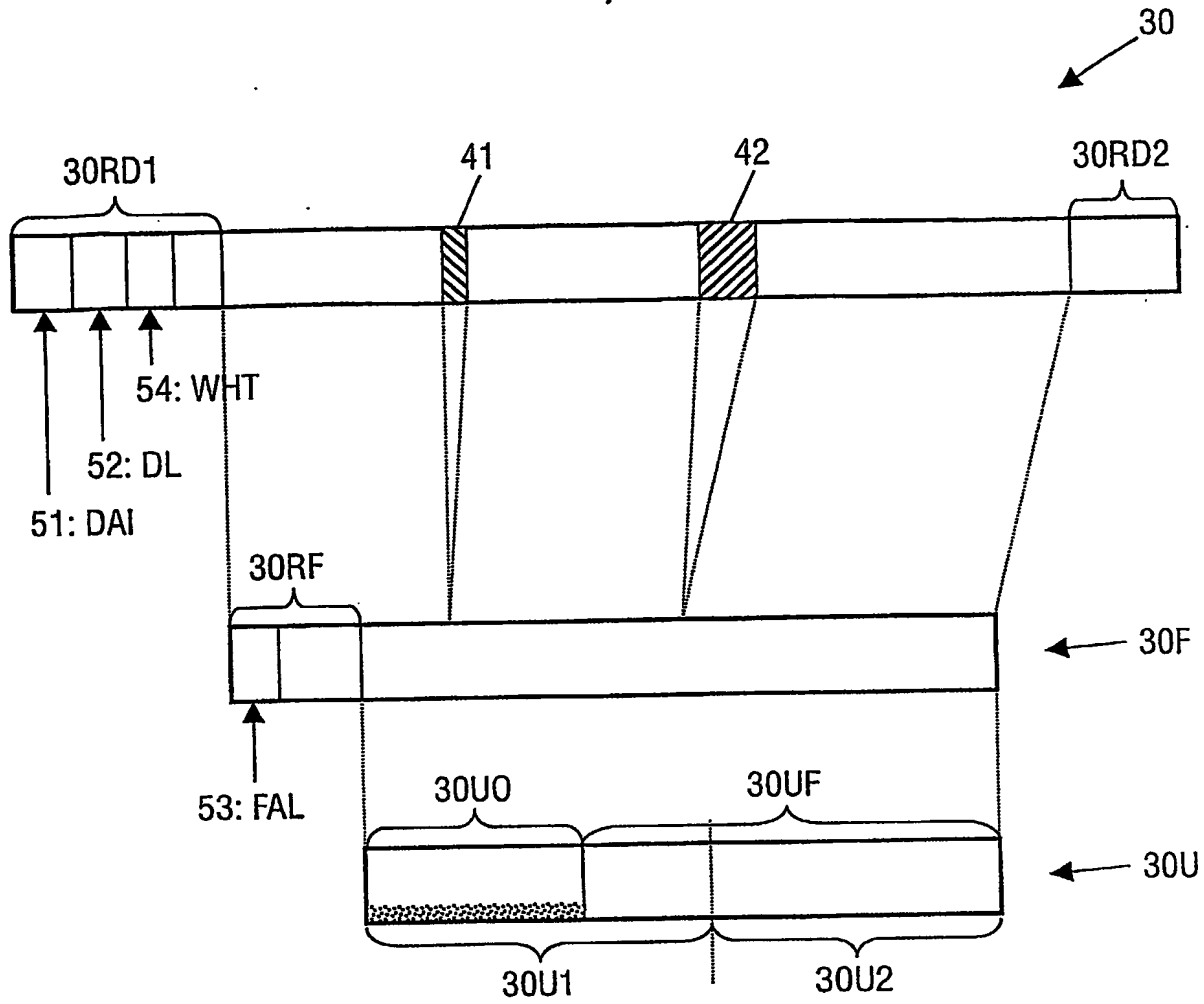


FIG.6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.